

# CrowView Yoga

15.6" Foldable Dual Monitors



User Manual

## 01 Product Brief


---

CrowView Yoga offers a variety of display modes, including Clone, Alone, Link, and Presentation Mode, providing users with flexible solutions for an extended workspace and enhanced work efficiency.

---

- Equipped with 15.6 inch display
- Dual-screen portable design
- Compatible with multiple devices or game consoles
- Supports full-featured USB-C signal input
- Multiple Display Modes
- 360° rotating design for easy storage and adaptability to various work environments




## 02 Buttons and Interfaces

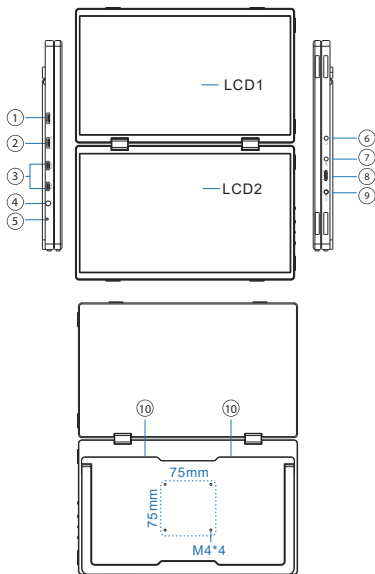

- ① Mini HD1(This interface only supports activating LCD1)
- ② Mini HD2
- ③ Type-C(Full-featured)
- ④ Headphone Jack
- ⑤ Status LED(Green light: normal operating; Flashing red light: power on, no signal input)
- ⑥ Power Button :  
Press and hold for 3-5 seconds to power on or off
- ⑦ Display Mode Button:
  - 1.Short press the “☐” button to enter display mode panel,
  - 2.Press “☐” button or “▲/▼” to navigate the display mode,
  - 3.Press the “☰” button to confirm
- ⑧ Wheel Switch:
  - 1.Short press the “☰” button to enter the menu setting interface.
  - 2.Press the “▲/▼” to navigate the menu or to adjust a value in the OSD.
  - 3.Press the “↶/↷” button to return to the previous level.
  - 4.Press the “☰” button to confirm.
  - 5.Toggle down “▼” to enter brightness menu, use “▲/▼” to adjust the value.
  - 6.Toggle up “▲” to enter volume menu, use “▲/▼” to adjust the value.
- ⑨ Signal and Back Button:
  - 1.Short press to enter signal source panel.
  - 2.To exit and return to previous level in the OSD.
- ⑩ Speakers

## 03 Connecting

Compatible with devices with Type-C (full-featured) interface(USB 3.1)

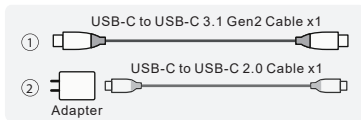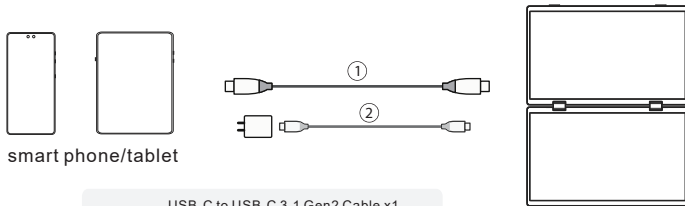
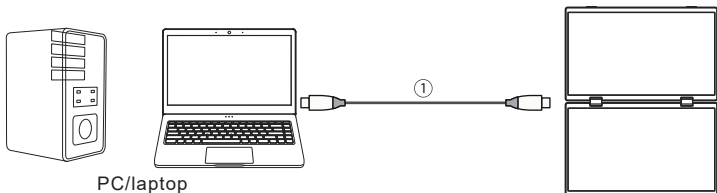


**Note:** 1.Please use a cable that can support full-featured, such as USB 3.1 Gen 2 Type-C Cable.

2.If the monitor does not get enough power from a single USB Type-C port, it may cause splash screen or interruption.  
Please use power adapter to get extra power to the monitor.

## 04 Connecting

Compatible with devices featuring an HD interface

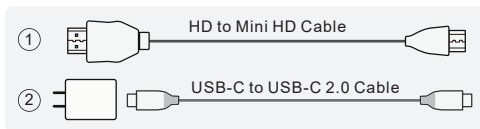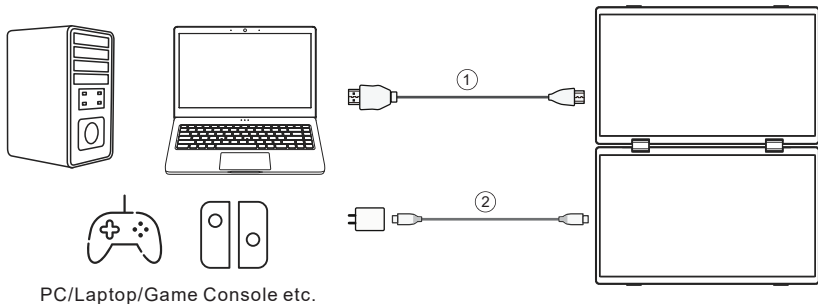





**Note:** Power the monitor with AC adapter via USB-C to USB-C 2.0 cable.

## 04 PC and CrowView Yoga Settings

### WINDOWS

(start>settings>system>display)

1. Enter the display settings (     )
2. You can drag the screen to rearrange it alone.
3. If you need to set different display modes for multiple screens, please click 1/2 (click " Identifying " at the bottom of the screen to recognize the corresponding screen) After selecting the corresponding monitor, go to the "Multi-display Settings" menu to set accordingly.


**Copy Mode:** Allows the Yoga and the main screen to display the same content.

**Extended Mode:** Allows the Yoga to act as an extended screen for the main display.

#### Screen

##### Rearrange displays

Select one of the displays below to change its settings. Long press (or select) a monitor, and then rearrange it by dragging.



Identifying

Detection

#### Multi-Display

Copy these displays

Expand these displays

Display only on 1

Display only on 2

Connect to wireless display

Advanced Display Settings

## 04 PC and CrowView Yoga Settings


### MAC

1. Open System Preferences.
  2. Select "Display" in the menu bar.
  3. Click the screen to drag to adjust the position.
  4. Click the screen to open the monitor settings.
- Select 'Main Display' to set the chosen screen as primary display and the other as extended display.
- Select 'Extended Display' to set the chosen screen as extended display, with the other as primary.
- Select "Mirroring of RTK FHD HD" to mirror the display content on both screens.



## 04 PC and CrowView Yoga Settings


When the PC is set to **Extended Mode**, the display mode for CrowViewYoga is as follows:

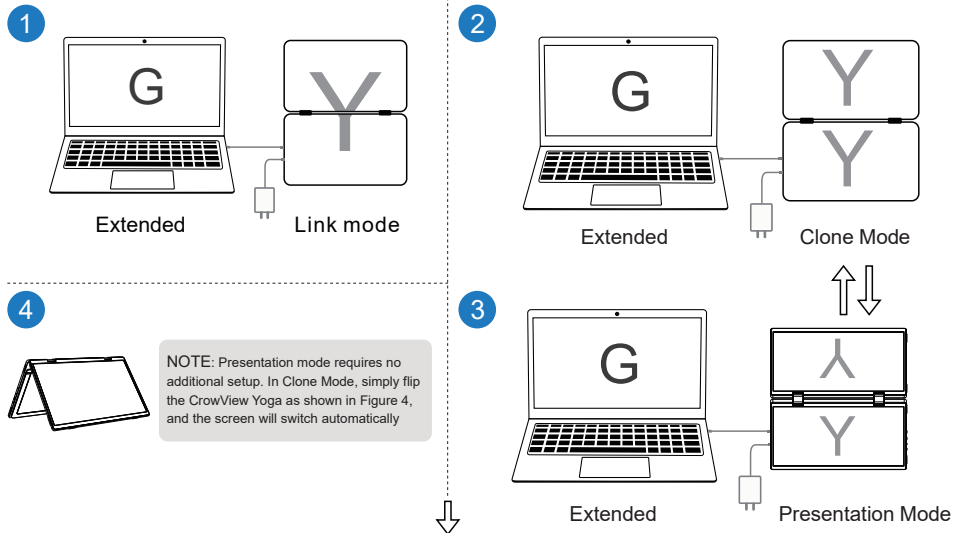



## 04 PC and CrowView Yoga Settings


5

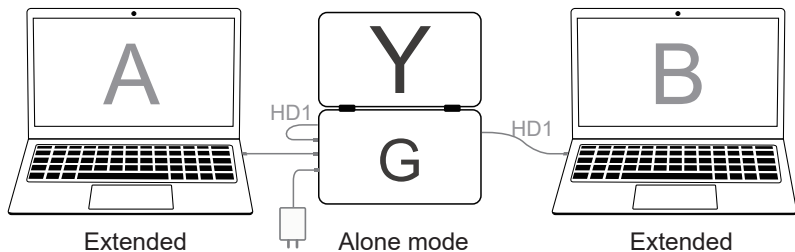

## 04 PC and CrowView Yoga Settings

When the PC is set to **Copy Mode** or **Mirror Display** the display mode for CrowViewYoga is as follows:


6

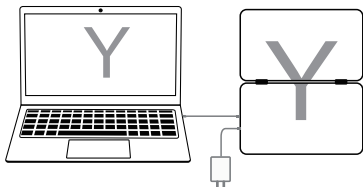

Mirror Displays

Link mode


7

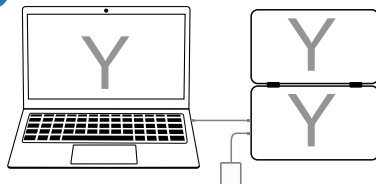

Mirror Display

Clone

8

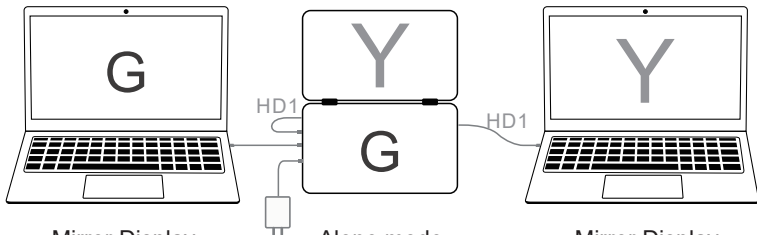













Mirror Display

Alone mode

Mirror Display

## 05 Menu Settings

BRIGHTNESS		
	BACKLIGHT	 54
	CONTRAST	 50
	ECO	◀ STANDARD ▶
	DCR	◀ OFF ▶
	SHARPNESS	 2
	HUE	 50
	SATURATION	 50
	BRIGHTNESS	 50

### BRIGHTNESS

**BACKLIGHT:** Adjustable range: 0-100

**CONTRAST:** Adjustable range: 0-100

**ECO:** STANDARD/RTS/FPS/MOVIE /GAME/TEXT

**DCR:** OFF/ON



**SHARPNESS:** Adjustable range: 0-4

**HUE:** Adjustable range: 0-100

**SATURATION:** Adjustable range: 0-100

**BRIGHTNESS:** Adjustable range: 0-100

## 05 Menu Settings

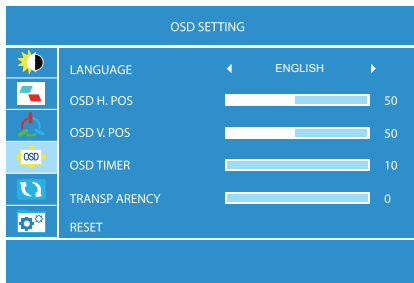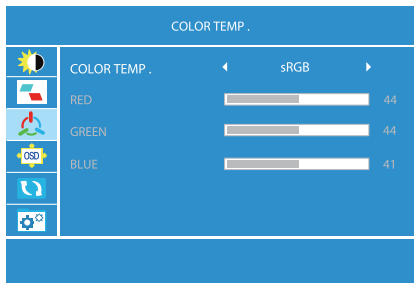

### COLOR TEMP

**COLORTEMP:**SRGB/USER/WARM/COOL

(RGB can only be adjusted in USER mode.)

**RED:** Adjustable range: 0-100

**GREEN:** Adjustable range: 0-100

**BLUE:** Adjustable range: 0-100

### OSD SETTING

**LANGUAGE:**

**Available languages:**English, French, German, Chinese, Italian, Spanish, Portuguese, Turkish, Polish, Dutch, Japanese, Korean

**OSD H.POS:** Adjustable range: 0-100



**OSD V.POS:** Adjustable range: 0-100

**OSD TIMER:** Adjustable range: 10-60

**TRANSPARENCY:** Adjustable range: 0-100

**RESET:** All settings will go to factory settings.

# 05 Menu Settings

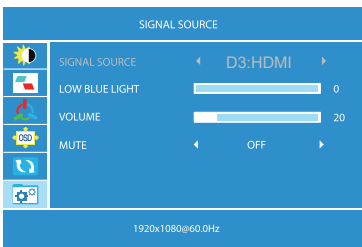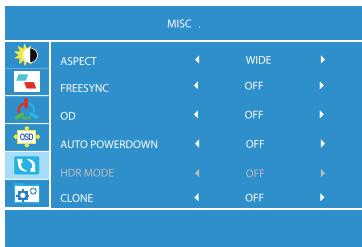

## MISC

**ASPECT:** WIDE/4:3

**FREESYNC:** OFF/ON

**OD:** OFF/ON

**AUTO POWERDOWN:** OFF/10/20/30/40/50/60/120/240

Note: Automatic powerdown in seconds, please press and hold the power button on the side of the display to turn Crowview Yoga on.

**CLONE:** OFF/ON

---

## SIGNAL SOURCE

**LOW BLUE LIGHT:** 0-4

**VOLUME:** Adjustable range: 0-100

**MUTE:** OFF/ON

## 06 Devices with Type-C interface

Smart Phone	
Apple	iPhone15 Pro, iPhone15 Pro Max ,iPhone16 Pro, iPhone16 Pro Max
Huawei	Mate10, Mate10pro, Mate20, Mate20pro, Mate30, Mate30pro, Mate30RS, Mate40, Mate40pro, Mate40pro+
	Mate40RS,Mate50,Mate50Pro,Mate50RS,P20,P20Pro,P20RS,P30,P30 Pro P40 ,P40 Pro,P50,P50 Pro
Samsung	Galaxy S8, Galaxy S8+, Galaxy S9, Galaxy S9+, Galaxy S10, GalaxyS10+, Galaxy S10e, Galaxy S20, Galaxy S20+
	Galaxy S20 Ultra, Galaxy S21, Galaxy S21+, Galaxy S21 Ultra, Galaxy S22, Galaxy S22+, Galaxy S22 Ultra,Galaxy S23,
	Galaxy S23, Galaxy S23+, Galaxy S23 Ultra, Galaxy S24, Galaxy S24+, Galaxy S24 Ultra,Galaxy Note8, Galaxy Note9,
	Galaxy Note10, Galaxy Note20
Laptops	
Apple	Macbook, MacBook Pro, MacBook Air (new)
Huawei	MateBook 13, MateBook X Pro, MateBook X, MateBook E, MateBook 14, MateBook 16
Samsung	Notebook 9 Pro, Notebook 7 Spin, Notebook 9, Notebook Flash
Microsoft	Surface Book 2
	VivoBook Flip, ROG STRIX Hero Edition, ROG Zephyrus M GM501GS, ROG STRIX
ASUS	Scar Edition, ZenBook Pro 15, ZenBook S, ROG Strix
	XPS9380, XPS 13 9370, Inspiron 13, Inspiron 15, Alienware 17, Alienware 15 R4, Latitude 5590, G3 17
Dell	Latitude7320,Latitude7420,Latitude7520,Latitude9510
	Pavilion x360, ENVY x360, Pavilion 15-cc610ms, ENVY x2, Pavilion 15-cx0051ms, EliteBookFolio G1
HP	ENVY x2 Detachable 12-E068MS, ENVY Notebook 17-u193ms, EliteBook 1050
Lenovo	Legion Y7000,Legion Y7000,PLegion Y9000K,Miix 630,Flex 1481EM000LUS,Flex 1481EM000KUS
	Flex 5 81CA0013US, Ideapad 720S, Flex 5 81CA0016US, ThinkBook14, ThinkBook15, ThinkBook16

More devices will be updated continuously...

## 07 Parameters

---


Screen Size	15.6"*2
Resolution	1920*1080 (FHD)
Color Gamut	100% sRGB/72%NTSC
Brightness	300cd/m <sup>2</sup>
Aspect Ratio	16:9
Power Supply	5V/3A, 9V/3A, 12/2.5A, 20V/1.5A
Interface	2* Type-C (full-featured) 2* Mini HD 1* Headphone Jack
Speaker	8Ω/2W 2*Speaker
Size	359*221*20.7mm (Folded State)
Weight	1450g

## 08 Packing List

---

Thanks for purchasing CrowView Yoga.

Please check that the following items are included when opening the box.




CrowView Yoga×1




Power Adapter




User Manual×1



USB-C to USB-C 2.0 Cable x1



USB-C to USB-C 3.1 Gen2 Cable x1



HD to Mini HD Cable×1

## 09 Customer Support

---

If you have any questions, customer support is always stand by.



[info@elecrow.com](mailto:info@elecrow.com)



[techsupport@elecrow.com](mailto:techsupport@elecrow.com)